


S14 Splitter

Technical Product Data

Features

- Amplified & Passive Versions Available
- Passes GPS, Galileo & GLONASS L1/L2
- Excellent Gain Flatness
Gain | L1 - L2 | < 2 dB
- RoHS/WEEE Compliant
- Designed to Mil. Std. 810

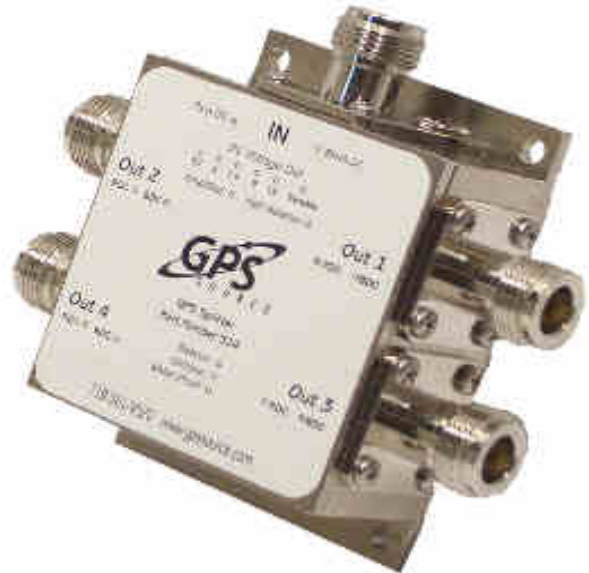

Description

The S14 GPS Splitter is a one-input, four-output GPS device. This product typically finds application where an input from an active GPS roof antenna is split evenly between four receiving GPS units. In this scenario, the S14 can be configured to pass DC from an RF output (J1) to the antenna input port in order to power an active GPS antenna on that port. The second, third and fourth RF outputs (J2, J3, & J4) would feature a 200 Ohm DC load to simulate an antenna DC current draw for any receiver connected to those ports.

The S14 splitter comes with many available options to meet your specific needs. Please call, fax, email (sales@gpssource.com), or visit our website (www.gpssource.com) for further information on product options, specifications, or to receive an easy to use order sheet.

Electrical Specifications, Operating Temperature -40 to 85 C

Parameter	Conditions	Min	Typ	Max	Units	
Freq. Range	Ant – Any Port, Unused Ports - 50 Ω	1		2	GHz	
In/Out Imped.	Ant, J1, J2, J3, J4		50		Ω	
Gain ⁽⁴⁾⁽⁵⁾	Ant – Any Port, Unused Ports - 50 Ω					
-Amplified (Norm)		20	21	22	dB	
-Amplified (Cust Gain)	As Specified (XdB)	X-1	X	X+1		
Loss-Passive ⁽⁵⁾	Ant – Any Port, Unused Ports - 50 Ω	6.5	7.5	8.5	dB	
Input SWR ⁽⁵⁾	All Ports 50Ω			2.0:1	-	
Output SWR ⁽⁵⁾	All Ports 50Ω			2.0:1	-	
1dB Comp. Pt. (Ampl.)	All Ports 50Ω		-32		dBm	
Input IP ₃ (Ampl.)	All Ports 50Ω		-24		dBm	
Noise Figure-Amplified	Ant – Any Port, Unused Ports - 50 Ω			1.8	dB	
Gain Flatness ⁽⁵⁾	L1 - L2 , Ant – Any Port, Unused Ports - 50 Ω					
-Amplified:				2	dB	
-Passive:				1		
Amp. Balance	J1 - J2 , Ant – Any Port, Unused Ports - 50 Ω			0.5	dB	
Phase Balance	Phase (J1 - J2), Ant – Any Port, Unused Ports - 50 Ω			1.0	deg	
Group Delay Flatness	$\tau_{d,max} - \tau_{d,min}$, Ant – Any Port			1	ns	
Isolation						
-Amp/Pass (Norm)	Adjacent Ports: Ant - 50Ω	13			dB	
	Opposite Ports: Ant - 50Ω	21			dB	
-Amplified (Hi Iso.)	Adjacent Ports: Ant - 50Ω	30			dB	
	Opposite Ports: Ant - 50Ω	40			dB	
AC IN	110	Wall Mount Transformer ⁽³⁾		110	VAC	
	220/240	Wall Mount Transformer (Various Intl. plug types available) ⁽³⁾		230	VAC	
DC IN	DC Blk	Any DC Blocked Port with a 200 Ω Load			14	VDC
	Pass DC	Non-Powered Configuration, DC Input on J1	3		16	VDC
	-Amplified -Passive				16	
	Powered	Powered, Mil. Conn. or Quick Connect Option	3 ⁽¹⁾		28 ⁽²⁾	VDC
Device Current	Current Consumption of device, excludes Ant. Cur.			16	mA	
Ant/Thru Current	Pass DC	Non-Powered Configuration, DC Input on J1			250	mA
	Powered	Powered, Mil. Conn. or Quick Connect Option			Note 3	mA
Max RF Input	Max RF input without damage			0	dBm	
-Amplified				30		
-Passive						

Notes:

- DC IN for powered option must be 2V greater than desired DC Voltage Out
- Maximum DC IN is 35V when 1275B Powered option is included
- Maximum combined DC current draw out all ports of the device is a function of the DC input voltage and desired DC output voltage, according to the following:


$$I_{out} \leq 1.4 / (V_{DC IN} - V_{DC OUT}) - 0.016 \text{ Amps}$$

For powered option with a wall mount transformer (Voltage Input = 110/220/240 VAC), V_{DC IN} is 9V.






- Choose Custom Gain Option for improved port-to-port isolation
- Performance guaranteed for N(F) connectors

Performance Data:

S14 Active - Normal

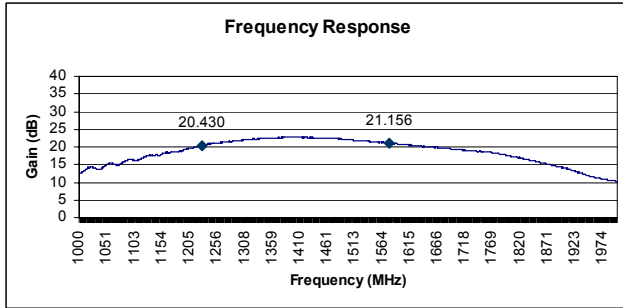

S14 Active - Hi Isolation

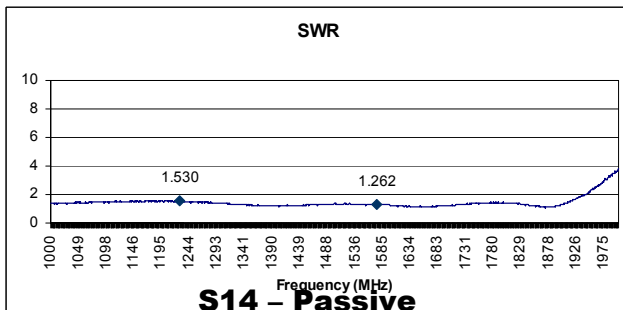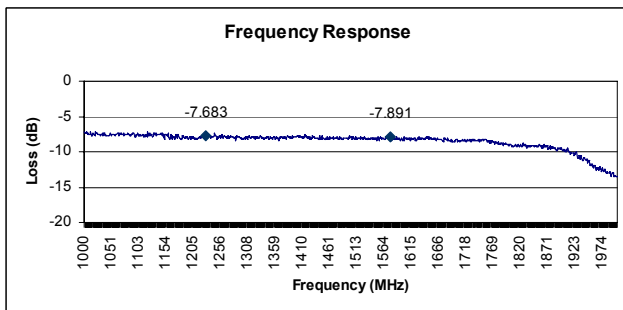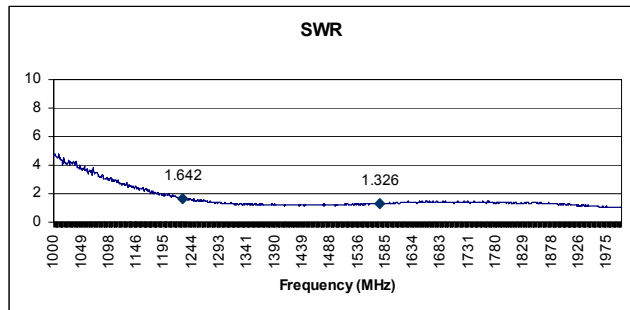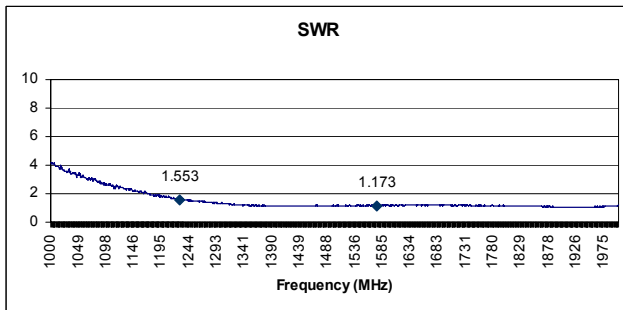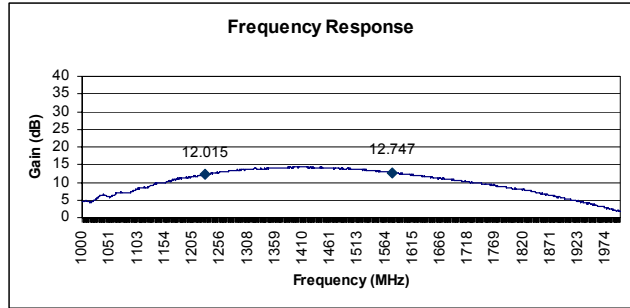

S14 - Passive

Available Options:

Power Supply Options:		
Source Voltage Options	Voltage Input	Type
	110 VAC	Wall Mount Transformer
	220 VAC	Wall Mount Transformer
	240 VAC (U.K.)	Wall Mount Transformer
	DC 5-28 VDC	Military Style Connector or w/Quick Connects
Output Voltage Options⁽¹⁾	DC Voltage Out⁽²⁾	
	3.3	
	5	
	7.5	
	9	
	12	
	Variable (3-12V)	
Custom		
RF Connector Options:		
Connector Options	Connector Type	Limitations
	N (Male & Female)	
	SMA (Male & Female)	
	TNC (Male & Female)	
	SMB (Female)	
	SMC (Female)	
	MCX (Female)	
	BNC (Male & Female)	Performance Not Guaranteed
Housing Options:		
Housings	Housing Type	Limitations
	Standard	None
	Slimline	Powered Option Not Ava. Connectors Not Available: N, TNC, BNC
Port Options:		
Pass DC ⁽¹⁾	All Ports Pass DC	
DC Blocked ⁽¹⁾	J2,J3,J4 are DC Blocked & 200Ω Loaded, DC is passed J1 to ANT	

Notes:

1. With Powered Option, any or all RF ports (input or output) can be DC Blocked or can pass the powered DC voltage
2. Maximum combined DC current draw out all ports of the device is a function of the DC input voltage and desired DC output voltage , according to the following:

$$I_{out} \leq 1.4 / (V_{DC IN} - V_{DC OUT}) - 0.016 \quad \text{Amps (or 250mA max)}$$

For powered option with a wall mount transformer (Voltage Input = 110/220/240 VAC), $V_{DC IN}$ is 9V.



Part Number:

S14 - A - P110 / 5 - SF

Product:

Standard 1x4 Splitter
(Pass DC J1-Ant, J2,J3,J4 DC Blk.)

Gain Option:

A – Amplified
Blank – Passive
AXX – Custom Gain, XXdB

Source Voltage:

P110 – Transformer,
P220 – Transformer,
P240 – Transformer,
PDC – DC w/Quick Connects
PM – Military Connector (User supplies DC)
PMS – 1275B Surge Suppression STD

Output Voltage:

3.3, 5, 7.5, 9, 12, XX, V – Denotes Output Voltage
(XX – custom output voltage, V – variable)


Connector Options:

NM – N, Male
NF – N, Female
SM – SMA, Male
SF – SMA, Female
TM – TNC, Male
TF – TNC, Female
BM – BNC, Male
BF – BNC, Female
SB – SMB Jack, Female
SC – SMC Jack, Female
MX – MCX Jack, Female

For help in creating the part number to meet your exact needs, contact us at Sales@gpssource.com or visit our website at www.gpssource.com .

Mechanical:

Standard Housing:

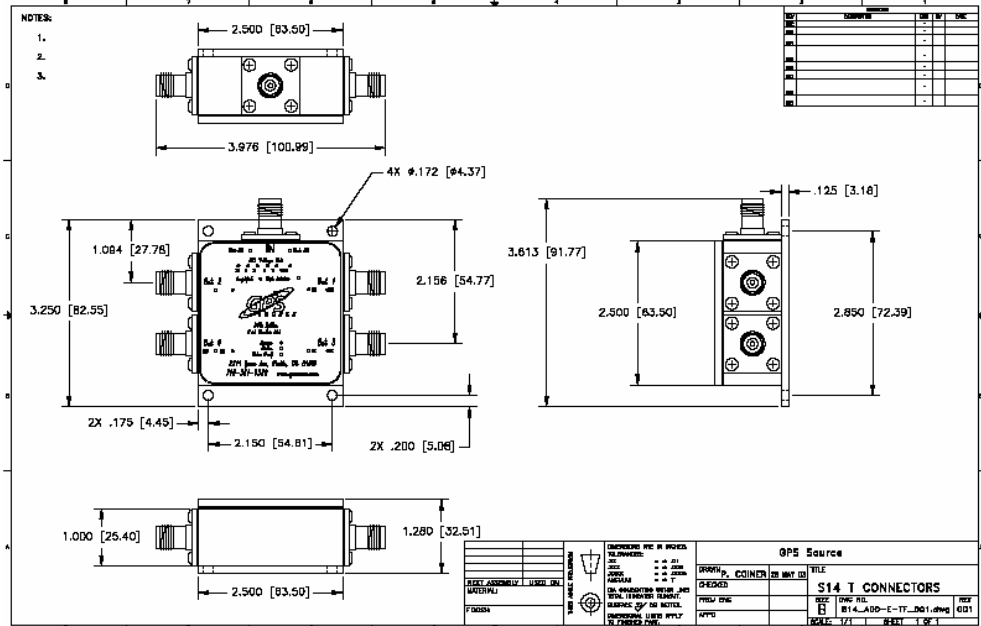

Slimline Housing:

